


				Client: NIS Foundation	Construction of Abudwak stadium			
No.	Revision Notes :	BY	Date		Layout of Abudwak Stadium			
					Activity	NAME	SIGNATURE	DATE
					Designed			June 2024
					Checked			
					Revision Suffix			

[illegible][illegible]

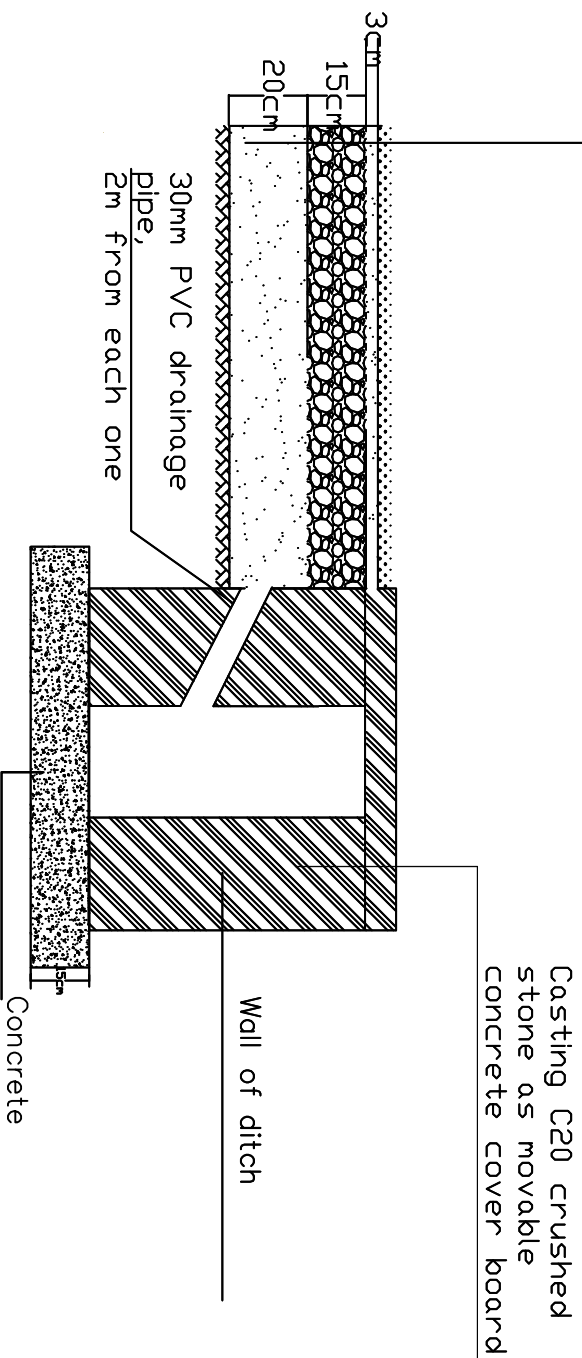
## Artificial Turf

Provide, place 1–2cm of sand as infill on top of the Artificial Turf.

Provide, place and compact to 95% MDD (AASHTO T180), layer of fine aggregate. (3cm quarry dust on top of base layer)

Provide, place and compact to 95% MDD (AASHTO T180), 150mm Unbound base course including levelling and compaction (layer of 15cm aggregate size 4–10mm).

Provide, place and compact to 95% MDD (AASHTO T180), 200mm natural Murrum soil mixed with Gravel for subbase

[illegible]

Provide, place and compact to 95% MDD (AASHTO T180), 150mm Unbound base course including levelling and compaction (layer of 15cm aggregate size 4-10mm).



Provide, place 1-2cm of sand as infill on top of the Artificial Turf.

Provide, place and compact to 95% MDD (AASHTO T180), layer of fine aggregate. (3cm quarry dust on top of base layer)

Provide, place and compact to 95% MDD (AASHTO T180), 200mm natural Murrum soil mixed with Gravel for subbase